

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 December 2000 (28.12.2000)


PCT

(10) International Publication Number
WO 00/79708 A1

- (51) International Patent Classification⁷: **H04B 17/00**, 7/185
- (74) Agents: **VON FISCHERN, Bernhard** et al.; Hoffmann . Eitle, Arabellastrasse 4, D-81925 Munich (DE).
- (21) International Application Number: PCT/EP99/04241
- (81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (22) International Filing Date: 18 June 1999 (18.06.1999)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (*for all designated States except US*): **SO-CIETE EUROPEENNE DES SATELLITES S.A.** [LU/LU]; L-6815 Château de Betzdorf (LU).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): **BETHSCHEIDER, Gerhard** [DE/DE]; Wiesenweg 12, D-54441 Ayl (DE). **HARLES, Guy** [LU/LU]; 48A, rue du 9 mai 1944, L-2112 Howald (LU).
- Published:**
- With international search report.
 - With amended claims and statement.

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR DETERMINING CHARACTERISTICS OF COMPONENTS OF A COMMUNICATION CHANNEL

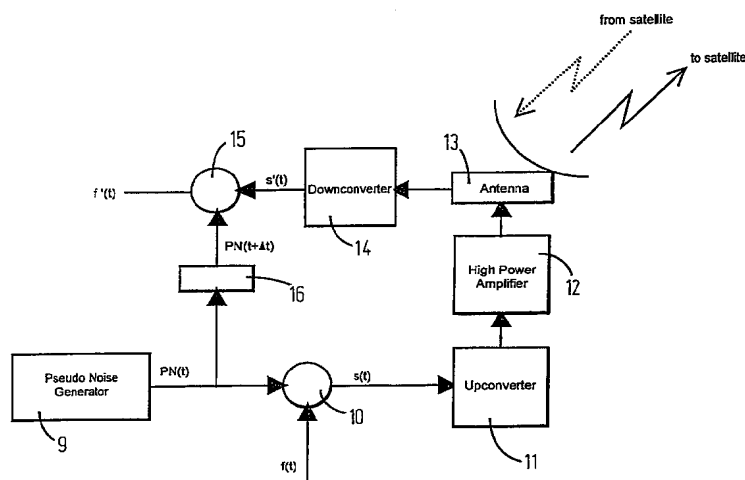

(57) Abstract: The invention refers to a method and an apparatus for determining characteristics of components of a communication channel. In order to simplify the inter-system coordination in a beginning of life test of a satellite communication channel and avoiding the interference of adjacent satellite systems the method according to the invention comprises the following steps: modulating a clean carrier signal $f(t)$ by spread spectrum modulation to generate a spreaded clean carrier signal $s(t)$; transmitting said spreaded clean carrier signal $s(t)$ through said communication channel at a first predetermined level; receiving a receive signal $s'(t)$ corresponding to said spreaded clean carrier signal $s(t)$ after having traveled through said communication channel; demodulating said receive signal $s'(t)$ by spread spectrum demodulation to generate a despreaded carrier signal $f'(t)$; determining characteristics of components of the communication channel on the basis of a comparison of said clean carrier signal $f(t)$ and said despreaded carrier signal $f'(t)$.



WO 00/79708 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

**Method and Apparatus for Determining Characteristics of
Components of a Communication Channel**

This invention refers to a method for determining
5 characteristics of components of a communication channel and
in particular of a satellite communication channel.

After a successful launch of a new communications satellite,
it is essential to test the communication's subsystem while a
10 spacecraft is in orbit so as to compare with prelaunch data
in order to ensure that no impairment has resulted from the
stress of the launch and to verify that the spacecraft
payload is compliant with the specification sought.

15 As to the in-orbit test technology it has to be considered
that the spacecraft has to be operational very quickly while
not sacrificing the number of tests that have to be performed.
Thus, microwave measurement techniques with more powerful
computers and software technology have been used to automate
20 the beginning of life test of a new communications satellite.

In order to give an understanding of the tests which have to
be performed, it has to be noted that a communication channel
is in general separated in adjacent channels with the help of
25 adequate filters. The channel filters fulfill two distinctive
tasks: in first place, the specific channel filters have to
avoid an interference from and to adjacent channels, and
secondly, the signal passing the channel must not be subject
to distortion due to filter characteristics. In the
30 following, a satellite transponder as a communication channel
is described more in detail with regard to Fig. 1.

A transponder of a communication satellite comprises a
receiving antenna 1 for receiving an uplink signal sent from
35 a ground station (not shown). An output signal of said
receiving antenna 1 is fed to an input demultiplexer (IMUX) 3
after frequency conversion in frequency converter 2. Said
input demultiplexer 3 comprises several first filters 4-1 to
4-n for separating individual signals within the signal from

the antenna. Typically, one filter is provided for each signal to be separated from the other signals received via said receiving antenna 1 and corresponds to a communication channel. The n output signals of said input demultiplexer 3 are fed to a corresponding number of high power amplifiers 5-1 to 5-n in each of which a traveling wave tube (TWT) is employed for amplifying the output signals of said input demultiplexer 3. As each of said high power amplifiers is normally operated in its saturation point, multiple signals would create intermodulation products and distortion of the signals. The amplifier output signals are passed through second filters 6-1 to 6-n which are part of an output multiplexer (OMUX) 7 combining the n amplifier output signals. The output signal of said output multiplexer 7 is fed to a transmitting antenna 8 for being transmitted to the desired area on the ground.

Hence, the demultiplexer (IMUX) consists of one filter per channel which separates the wanted signal from all other incoming signals. This separation is necessary in order to avoid multiple signals to reach the respective high power amplifier. Each channel has its own assigned high power amplifier (generally a traveling wave tube amplifier). As these high power amplifiers are normally operated in their saturation point, multiple signals would create intermodulation products, and thus distort the signals at the output of the satellites transmit antenna (down-link).

After the amplification, the signals are passed through a second filter (at the output multiplexer OMUX filter) which should avoid the broadband noise of the amplifiers to interfere with adjacent channels. Before being transmitted via the satellite's transmit antenna, all signals are combined again in the output multiplexer (OMUX).

The transponder filter characteristics are thus mainly determined by the IMUX and OMUX filters, which are in general realized in waveguide technology. Prior to launching a

satellite, the filters are designed and tested according to specifications. After the launch, the entire satellite, including the payload and especially the filters have to be tested in order to verify if during the launch phase, filters
5 have been damaged. The beginning of life tests are thus a very crucial part before the operational life of a satellite.

For the beginning of life tests, the satellite is in general placed at an orbital position, which is not the final
10 destination of the satellite. The reason for this is for instance that if the satellite contains transponders (back-up) which may interfere with operational transponders, the measurement signal on the satellite under test may create interference to payload signals of the operational
15 satellites.

The orbital position on which a new satellite is placed during beginning of life tests is in general coordinated in such a way that no interference is created to any operational
20 system. However, as the geostationary arc is more and more crowded with Ku-band satellites, it becomes more and more difficult to identify a slot, in which all bands of the satellite under test may be measured with high power signals.

25 Hence, when planning in-orbit tests on a communication satellite, a major constraint is to ensure that no radio interference can be generated, disturbing other communications satellite systems sharing the same frequency bands and, conversely, that the results of the satellite
30 under in-orbit testing are not jeopardized by transmissions associated with other systems.

From the publication in International Journal of Satellite Communications, Vol. 13, 403-412 (1995); C. Moens and F.
35 Absolonne: "ESA's in-orbit test facilities for communications satellites" those aspects were analyzed by a in-orbit test plan to cope with the following situations of the "maritime

satellite based on the European communication satellite system bus" - program:

5 (1) The presence of other maritime satellites resulted in non-permissible frequency slots in which it was not allowed to generate a carrier from the ground or from the satellite payload, e.g. the TDMA access channel and the search and rescue frequency band. This was accommodated in the software of the in-orbit testing computer by creating a frequency plan
10 which inhibited use of the non-permissible frequency slots, such that test signals can only be generated in the permitted frequency channels.

15 (2) The second problem was created by the forward transponder containing an automatic level control function which keeps the output power constant irrespective of the transponder loading. The consequence is that the transmitted noise power increases, as transponder loading decreases, to reach an unacceptable level (from the interference point of view) when
20 the transponder is not loaded. This difficulty has been overcome by ensuring a permanent minimum loading of the forward transponder. The loading was created by automatically up-linking two carriers, generated by dedicated synthesizers, during the inactive periods of the payload commissioning and
25 acceptance phases. In the case of a malfunction in the C-band up-link during any in-orbit test, the minimum loading violation was detected by a specific computer program activating the loading carriers and aborting the ongoing test. The last result was for the European Space Operations
30 Center to switch off the satellite payload.

Hence, according to conventional techniques the characteristics as amplitude response and group delay of the IMUX and OMUX filters is performed with a microwave link
35 analyzer, which uses a frequency modulated carrier to measure amplitude response and group delay. The microwave link analyzer determines the group delay at a specific frequency by differentiating of the phase delay over frequency. As in a

channel using a high power amplifier like a TWTA, the amplitude to phase modulation (AM/PM) conversion can lead to erroneous measurements, the power of the MLA signal has to be far below the saturation point.

5

The most important drawback of this conventional technique is that the measurement signal can create interference to an adjacent satellite system, due to the use of measurement signals having high spectral density. On the other hand, the measurement signal itself may be subject to noise and interference created by signals coming from adjacent satellites.

Therefore, it is an object of the invention to simplify the inter-system coordination in a beginning of life test and avoiding the interference of adjacent satellite systems.

This object is solved by the features of a method according to claim 1 and an apparatus according to claim 6.

20

A method according to the invention for determining characteristics of components of a communication channel comprises the following steps:

- 25 1. - modulating a clean carrier signal $f(t)$ by spread spectrum modulation to generate a spreaded clean carrier signal $s(t)$;

- transmitting said spreaded clean carrier signal $s(t)$
30 through said communication channel at a first predetermined level;

- receiving a receive signal $s'(t)$ corresponding to said spreaded clean carrier signal $s(t)$ after having traveled
35 through said communication channel;

- demodulating said receive signal $s'(t)$ by spread spectrum demodulation to generate a despreaded carrier signal $f'(t)$;

5 - determining characteristics of components of the communication channel on the basis of a comparison of said clean carrier signal $f(t)$ and said despreaded carrier signal $f'(t)$.

10 Spread spectrum modulation and demodulation is a communication technique wherein the transmitted modulation is spread (increased) in bandwidth prior to transmission over the channel and then despread (decreased) in bandwidth by the same amount at the
15 receiver. By far the most popular spreading techniques are direct sequence (DS) modulation and frequency hopping (FH) modulation.

20 A direct sequence modulation is formed by linearly modulating the output sequence of a pseudo random number generator onto a chain of pulses, each having a duration called the chip time. This type of modulation is usually used with binary phase-shift-keyed (BPSK) information signals. As such the modulated signal is formed by first
25 multiplying (modulo-2) the pure information bitstream with the pseudo noise sequence and then modulating the phase of a clean carrier signal with the resulting signal.

30 At the receiver, either the PN waveform is already available or the receiver must first acquire the PN waveform. That is, the local PN random generator that generates the PN waveform at the receiver used for despreaded must be aligned (synchronized) within one
35 chip of the PN waveform of the received signal. This is accomplished by employing some sort of search algorithm which typically steps the local PN waveform sequentially in time a fraction of a chip (e.g., half a chip) and at

each position searches for a high degree of correlation between the received and local PN reference waveforms. The search terminates when the correlation exceeds a given threshold, which is an indication that the alignment has been achieved. After bringing the two PN waveforms into coarse alignment, a tracking algorithm is employed to maintain fine alignment. The most popular form of tracking loops are the continuous time delay-locked loop and its time multiplexed version the tau-dither loop.

A frequency hopping modulation is formed by non-linearly modulating a chain of pulses with a sequence of pseudo randomly generated frequency shifts. This modulation signal is multiplied by a complex multiple-frequency-shift-keyed (MFSK) information signal. At the receiver, the sum of the transmitted signal and the channel interference is complex multiplied by the identical frequency hopping modulation which returns the transmitted signal to its original MFSK form. Analogous to the direct sequence case the receiver must acquire and track the frequency hopped signal so that the dehopping waveform is as close to the hopping waveform as possible.

2. Steps according to 1, wherein the spread spectrum modulation comprises the steps of

- generating a first pseudo noise signal $PN(t)$;

- modulating said clean carrier signal $f(t)$ with said first pseudo noise signal $PN(t)$ to generate said spreaded clean carrier signal $s(t)$;

and wherein the spread spectrum demodulation comprises the steps of

- correlating said receive signal $s'(t)$ with said first pseudo noise signal $PN(t)$ to generate said despread carrier signal $f'(t)$.

- 5 3. Steps according to 2, wherein said first pseudo noise signal $PN(t)$ is a binary pseudo noise sequence.
4. Steps according to 3, wherein said binary pseudo noise sequence is generated by means of a feed back shift
10 register or a memory device in which a sequence of values of a pseudo noise signal is stored.
5. Steps according to 2 to 4, wherein a chiprate of said first pseudo noise signal $PN(t)$ is less than 5 MChip/s.
15 6. Steps according to 5, wherein a chiprate of said first pseudo noise signal $PN(t)$ is less than or equal to 2,5 MChip/s.
- 20 7. Steps according to 2 to 6, wherein said correlating of said receive signal $s'(t)$ and said first pseudo noise signal $PN(t)$ is achieved by delaying said first pseudo noise signal $PN(t)$ and multiplying the delayed first pseudo noise signal $PN(t)$ and said receive signal $s'(t)$.
25 8. Steps according to 1 to 7, wherein the communication channel is a satellite communication channel set up by a transponder of a satellite.
- 30 9. Steps according to 8, wherein said first predetermined level is adjusted such that the spread clean carrier signal $s(t)$ is received by an end user terminal of a communication channel of an adjacent channel with a level which is under the level of a received payload
35 signal of said communication channel by a predetermined threshold.

5 In practice it has to be noted that the allocations of the frequency bands and the levels of the payload signals of adjacent satellite communication channels is well known and therefore it is possible to find an arrangement with another operator of the respective adjacent satellite communication channel in order to define the necessary threshold.

10 However, when determining the level for a clean carrier signal to be sent out by a ground station also the spatial separation or the spatial discrimination, respectively, of an antenna has to be considered. Thus, in a first step the allocation data of the frequency bands and the levels of the payload signals of adjacent
15 satellites is taken as a basis for determining the given threshold. In a second step, furthermore the spatial separation characteristic both of the own ground station and the enduser terminals directed to an adjacent satellite are considered. Basically, in this situation
20 two types of interference may happen. Either the users of an adjacent satellite receive in addition to the payload of the adjacent satellite the test signals via the enduser terminal or the own ground station also transmits a small portion of its signal to the adjacent
25 satellite. The first type of interference is more likely to happen, as professional station normally have a much higher discrimination than enduser antennas just because of the different aperture. In this respect, the driving factor for dimensioning the measurement signal uplink
30 power depends upon the spatial separation of both satellites and the related antenna discrimination, as well as on the level difference between the payload signal of the adjacent satellite and the measurement signal of the own satellite.

35

10. Steps according to 9, wherein said first predetermined threshold is selected preferably between 15 dB and 25 dB.

11. Steps according to 9 or 10, wherein a measure for said first predetermined threshold is the processing gain which is defined by the ratio of the spectrum bandwidth of the first pseudo noise signal $PN(t)$ and the data rate of the clean carrier signal $f(t)$, and wherein the data rate of the clean carrier signal $f(t)$ is a result of the predetermined threshold and the predetermined spectrum bandwidth of the first pseudo noise signal $PN(t)$.

Hence, in accordance with this aspect of the present invention it is possible to reach almost any desired first predetermined level by selecting the data rate of the clean carrier signal $f(t)$ accordingly.

12. Steps according to 1 to 8, wherein said first predetermined level of said spreaded clean carrier signal is adjusted by the following steps:

a) setting a preliminary level which corresponds to a lower limit in the communication channel;

b) processing said despreaded carrier signal $f'(t)$ in order to determine actual characteristics of said despreaded carrier signal $f'(t)$;

c) determining the deviation between the actual characteristics and predetermined desired characteristics of said despreaded carrier signal $f'(t)$;

d.1) if the deviation is above a predetermined deviation: increasing the preliminary level by an incrementation parameter and repeating steps b) to d.1);

d.2) otherwise allocate the actual preliminary level to said first predetermined level.

Hence, in accordance with this aspect of the present invention no arrangement for a first predetermined

threshold is necessary. Rather the first predetermined level is adjusted by approaching a minimum level which is necessary to still receive sufficient characteristics of said despreaded carrier signal $f'(t)$. This is done by starting at a preliminary level which is assumed to the lower limit in the communication channel and according to which no interferences with adjacent communication channels will occur.

13. Steps according to 1 to 12, further comprising:

- modulating a reference carrier signal $f_R(t)$ by spread spectrum modulation to generate a spreaded reference carrier signal $s_R(t)$;

- transmitting said spreaded reference carrier signal $s_R(t)$ through said communication channel at a second predetermined level;

- receiving a reference receive signal $s_R'(t)$ corresponding to said spreaded reference carrier signal $s_R(t)$ after having traveled through said communication channel;

- demodulating said reference receive signal $s_R'(t)$ by spectrum demodulation to generate a despreaded reference carrier signal $f_R'(t)$; and

- determining characteristics of components of the communication channel also on the basis of a comparison of said reference carrier signal $f_R(t)$ and said despreaded carrier signal $f_R'(t)$.

This aspect of the present invention considers the fact that, during measurements in a satellite communication channel, due to the movements of the satellite the distance to the satellite can change. Also, during

measurements, due to atmospherical effects the attenuation of the path loss between the ground and the satellite can change. Therefore, e.g. in the case when the amplitude response and the group delay is determined by subtracting the amplitude response and the group delay at the center frequency from the respective values at other discrete frequencies, an error might occur due to the before mentioned satellite movements and atmospherical effects or other influences. These measurement errors can be compensated by the steps 13.

14. Steps according to 13, wherein the spread spectrum modulation comprises the steps of

- generating a second pseudo noise signal $PN_R(t)$;
- modulating said reference carrier signal $f_R(t)$ with said second pseudo noise signal $PN_R(t)$ to generate said spreaded reference carrier signal $s_R(t)$;

and wherein the spread spectrum demodulation comprises the steps of

- correlating said reference receive signal $s_R'(t)$ with said second pseudo noise signal $PN_R(t)$ to generate said despreaded reference carrier signal $f_R'(t)$.

15. Steps according to 13 or 14, wherein said second predetermined level is adjusted by a predetermined threshold below the level of a transmitted payload signal of an adjacent satellite communication channel.

16. Steps according to 15, wherein the predetermined threshold is selected preferably between 15 dB and 25 dB.

17. Steps according to 15 or 16, wherein a measure for the predetermined threshold is the processing gain which is defined by the ratio of the spectrum bandwidth of said second pseudo noise signal $PN(t)$ and the data rate of the reference carrier signal $s_R(t)$, and wherein the data rate of the reference carrier signal $s_R(t)$ is a result of the predetermined threshold and the predetermined spectrum bandwidth of the second pseudo noise signal $PN(t)$.

18. Steps according to 13 or 14, wherein said second predetermined level of said spreaded clean carrier signal is adjusted by the following steps:

a) setting a preliminary level which corresponds to a lower limit in the communication channel;

b) processing said reference receive signal $s_R'(t)$ in order to determine actual characteristics of said reference receive signal $s_R'(t)$;

c) determining the deviation between the actual characteristics and predetermined desired characteristics of said reference receive signal $s_R'(t)$;

d.1) if the deviation is above a predetermined deviation: increasing the preliminary level by an incrementation parameter and repeating steps b) to d.1);

d.2) otherwise allocate the actual preliminary level to said second predetermined level.

19. Steps according to 14 to 18, wherein said second pseudo noise signal $PN(t)$ is a binary pseudo noise sequence.

20. Steps according to 19, wherein said binary pseudo noise sequence is generated by means of a feed back shift

register or a memory device in which a sequence of values of a pseudo noise signal is stored.

21. Steps according to 14 to 20, wherein said correlating of
5 said reference receive signal $S_R'(t)$ and said second
pseudo noise signal $PN_R(t)$ is achieved by delaying said
second pseudo noise signal $PN_R(t)$ and multiplying the
delayed second pseudo noise signal $PN_R(t)$ and said
reference receive signal $s_R'(t)$.
- 10 22. Steps according to 14 to 21, wherein said spreaded
reference signal $s_R(t)$ is transmitted through the same
transponder of the satellite and said second pseudo
noise signal $PN_R(t)$ not correlated with said pseudo
15 noise signal $PN(t)$.
23. Steps according to 13 to 22, wherein said spreaded
reference signal $s_R(t)$ is transmitted through a
different transponder of the satellite.
- 20 24. Steps according to 1 to 23, wherein one of the
characteristics of said communication channel is group
delay and / or amplitude response.
- 25 25. Steps according to 1 to 24, wherein the characteristics
of the input multiplexer (IMUX) and the output
multiplexer (OMUX) in a communication satellite are
determined.
- 30 Furthermore, the above-mentioned object is solved by an
apparatus for determining characteristics of components of a
communication channel, comprising the following means:
101. - first modulating means (10) for modulating a clean
35 carrier signal $f(t)$ by spread spectrum modulation to
generate a spreaded clean carrier signal $s(t)$;

- transmitting means (11, 12, 13) for transmitting said spreaded clean carrier signal $s(t)$ through said communication channel at a first predetermined level;

5 - receiving means (13, 14) for receiving a receive signal $s'(t)$ corresponding to said spreaded clean carrier signal $s(t)$ after having traveled through said communication channel;

10 - demodulating means for demodulating said receive signal $s'(t)$ by spread spectrum demodulation to generate a despreaded carrier signal $f'(t)$; and

15 - determining means for determining characteristics of components of the communication channel on the basis of a comparison of said clean carrier signal $f(t)$ and said despreaded carrier signal $f'(t)$.

102. Means according to 101, wherein the first modulation
20 means (10) comprises

25 - first pseudo noise signal generating means (9) for generating a pseudo noise signal $PN(t)$, said clean carrier signal $f(t)$ is modulated with said first pseudo noise signal $PN(t)$ to generate said spreaded clean carrier signal $s(t)$;

and wherein the demodulation means comprises

30 - first correlating means (14) for correlating said receive signal $s'(t)$ with said pseudo noise signal $PN(t)$ to generate said despreaded carrier signal $f'(t)$.

103. Means according to 102, wherein the first pseudo noise
35 signal generating means (9) is designed for generating a binary pseudo noise sequence.

104. Means according to 103, wherein said first pseudo noise signal generating means (9) is a feed back shift register or a memory device in which a sequence of values of a pseudo noise signal is stored.
- 5
105. Means according to 102 to 104, wherein a chiprate of said first pseudo noise signal $PN(t)$ is less than 5 MChip/s.
- 10
106. Means according to 105, wherein a chiprate of said first pseudo noise signal $PN(t)$ is less than or equal to 2,5 MChip/s.
- 15
107. Means according to 102 to 106, further comprising first delaying means (16) for delaying said first pseudo noise signal $PN(t)$.
- 20
108. Means according to 101 to 107, wherein the communication channel is a satellite communication channel set up by a transponder of a satellite.
- 25
109. Means according to 108, wherein said first predetermined level is adjusted such that the spread clean carrier signal $s(t)$ is received by an end user terminal of a communication channel of an adjacent channel with a level which is under the level of a received payload signal of said communication channel by a predetermined threshold.
- 30
110. Means according to 109, wherein said first predetermined threshold is selected preferably between 15 dB and 25 dB.
- 35
111. Means according to 109 or 110, wherein a measure for said first predetermined threshold is the processing gain which is defined by the ratio of the spectrum bandwidth of the first pseudo noise signal $PN(t)$ and the data rate of the clean carrier signal $f(t)$, and wherein

the data rate of the clean carrier signal $f(t)$ is a result of the predetermined threshold and the predetermined spectrum bandwidth of the first pseudo noise signal $PN(t)$.

5

112. Means according to 101 to 108, further comprising for adjusting said first predetermined level of said spreaded clean carrier signal:

10

- setting means for setting a preliminary level which corresponds to a lower limit in the communication channel;

15

- processing means for processing said despreaded carrier signal $f'(t)$ in order to determine actual characteristics of said despreaded carrier signal $f'(t)$ and for determining the deviation between the actual characteristics and predetermined desired characteristics of said despreaded carrier signal $f'(t)$;

20

- increasing means for increasing the preliminary level by an incrementation parameter if the deviation is above a predetermined deviation;

25

- allocation means for allocating the actual preliminary level to said first predetermined level if the deviation is below or equal a predetermined deviation.

30

113. Means according to 101 to 112, further comprising:

- second modulating means (18) for modulating a reference carrier signal $f_R(t)$ by spread spectrum modulation to generate a spreaded reference carrier signal $s_R(t)$;

35

- transmitting means (11, 12, 13) for transmitting said spreaded reference carrier signal $s_R(t)$ through said communication channel at a second predetermined level;

- receiving means (13, 14) for receiving a reference receive signal $s_R'(t)$ corresponding to said spreaded reference carrier signal $s_R(t)$ after having traveled through said communication channel; and

5

- demodulating means for demodulating said reference receive signal $s_R'(t)$ by spectrum demodulation to generate a despreaded reference carrier signal $f_R'(t)$; and

10

- determining means for determining characteristics of components of the communication channel also on the basis of a comparison of said reference carrier signal $f_R(t)$ and said despreaded carrier signal $f_R'(t)$.

15

114. Means according to 113, wherein the second modulation means comprises

20

- second pseudo noise signal generating means (17) for generating a second pseudo noise signal $PN_R(t)$, said reference carrier signal $f_R(t)$ is modulated with said second pseudo noise signal $PN_R(t)$ to generate said spreaded reference carrier signal $s_R(t)$;

25

and wherein the demodulation means comprises

30

- second correlating means (20) for correlating said reference receive signal $s_R'(t)$ with said second pseudo noise signal $PN_R(t)$ to generate a despreaded reference carrier signal $f_R'(t)$.

35

115. Means according to 113 or 114, wherein said second predetermined level is adjusted by a predetermined threshold below the level of a transmitted payload signal of an adjacent satellite communication channel.

116. Means according to 115, wherein the predetermined threshold is selected preferably between 15 dB and 25 dB.

5 117. Means according to 115 or 116, wherein a measure for the predetermined threshold is the processing gain which is defined by the ratio of the spectrum bandwidth of said second pseudo noise signal $PN(t)$ and the data rate of the reference carrier signal $s_R(t)$, and wherein the data
10 rate of the reference carrier signal $s_R(t)$ is a result of the predetermined threshold and the predetermined spectrum bandwidth of the second pseudo noise signal $PN(t)$.

15 118. Means according to 113 or 114, further comprising for adjusting said second predetermined level of said spreaded clean carrier signal:

- 20 - setting means for setting a preliminary level which corresponds to a lower limit in the communication channel;
- processing means for processing said reference receive signal $s_R'(t)$ in order to determine actual
25 characteristics of said reference receive signal $s_R'(t)$ and for determining the deviation between the actual characteristics and predetermined desired characteristics of said reference receive signal $s_R'(t)$;
- 30 - increasing means for increasing the preliminary level by an incrementation parameter if the deviation is above a predetermined deviation;
- 35 - allocation means for allocating the actual preliminary level to said second predetermined level if the deviation is below or equal a predetermined deviation..

119. Means according to 114 to 118, wherein the second pseudo noise signal generating means (9) is designed for generating a binary pseudo noise sequence.

5 120. Means according to 119, wherein said second pseudo noise signal generating means (9) is a feed back shift register or a memory device in which a sequence of values of a pseudo noise signal is stored.

10 121. Means according to 114 to 120, further comprising second delaying means (19) for delaying said second pseudo noise signal $PN_R(t)$.

15 122. Means according to 114 to 121, wherein said spreaded reference signal $s_R(t)$ is transmitted through the same transponder of the satellite and said second pseudo noise signal $PN_R(t)$ not correlated with said pseudo noise signal $PN(t)$.

20 123. Means according to 113 to 122, wherein said spreaded reference signal $s_R(t)$ is transmitted through a different transponder of the satellite.

25 124. Means according to 101 to 123, wherein one of the characteristics of said communication channel is group delay and / or amplitude response.

30 125. Means according to 101 to 124, wherein the characteristics of the input multiplexer (IMUX) and the output multiplexer (OMUX) in a communication satellite are determined.

All in all, with the method according to the invention using spread spectrum signals, one will be able to perform
35 measurements without creating interference to, or being interfered by channels of adjacent satellites.

If a pseudo random noise signal is used, it can be generated by feed back shift registers as described in Bernard Sklar: Digital Communications Prentice Hall 1988, for example. The pseudo random noise signal has the important characteristic of a very sharp autocorrelation function at zero delay. This allows to regenerate exactly the time delay between a locally generated PN signal and the (delayed) received signal.

For measuring the amplitude and group delay of a communications channel, one needs to choose the chiprate (which determines the overall bandwidth of the PN signal) of the PN signal such that the modulated PN signal is narrow in comparison with the expected peaks in group delay of the communication channel. In order to be able to measure during normal operation without disturbing any payload signal, it is important that the measurement signal level is sufficiently below the level of said payload signal (e.g. about 25 dB).

Under these conditions, one can sweep the carrier of the PN signal in frequency from the lowest to the highest frequency of the communications channel, and measure the amplitude of the correlation peak and the time delay of the received and demodulated PN signal at discrete frequencies. The amplitude and time delay correspond in this case to the amplitude response and the group delay of the communications channel at the selected frequencies.

A variation of the described method for measuring the group delay consists of measuring the phase of the reconstructed carrier of the spreaded signal at a specified frequency. By measuring the phase of the reconstructed carrier of the spreaded at a frequency very close to the first frequency, it is possible to approximate the group delay at the frequency located exactly in the middle of both measurement frequencies by calculating the phase difference and dividing by the frequency difference.

Besides this conventional technique, in the present case it is possible to measure the group delay at a certain frequency directly via the delay of the despread carrier signal $f'(t)$ in comparison with a pseudo noise signal $PN(t)$ which is fed
5 directly from the modulating means to the determining means.

For the characterization of the communications channel, the most interesting values are the amplitude response and the group delay with respect to the center frequency of the
10 channel. This is easily obtained in subtracting the measurements at center frequency from all the measurements.

Another characteristic which can be measured by the method according to the invention is the change of the frequency of
15 the carriers received on the uplinks to that on the downlinks (e.g. from 14 GHz to 11 GHz).

The measurements can be performed with one measurement signal and one frequency signal, but of course the use of multiple
20 measurement signals at different frequencies in parallel is possible, thereby increasing the measurement performance and the speed for carrying out the necessary measurements.

In the case of a satellite communication channel (a
25 transponder), one has to face the problem that during measurement, the distance to the satellite can change due to the movements of the satellite, or that due to atmospheric effects the attenuation of the path loss between the measurement instrument and the satellite can change.

30
These problems can be easily solved in using a reference signal which may be located at a fixed frequency somewhere on the same transponder (or even on a neighboring transponder but on the same satellite). If the measurement signal is
35 swept in frequency over the transponder, while the reference signal is remaining at a fixed frequency, one obtains the wanted amplitude response and group delay of the communications channel by subtracting the values of the

reference signal from the measurements signal at the corresponding time.

5 In the following an embodiment of the invention will be described in greater detail and with reference to the drawings.

Fig. 1 shows a schematic diagram of a transponder of a communication satellite;

10

Fig. 2 shows a schematic diagram of a first embodiment of an apparatus according to the invention;

15 Fig. 3a and 3b show diagrams representing measurement result;

20

Fig. 4 shows a schematic diagram of a second embodiment of an apparatus according to the invention.

25

Fig. 5 shows a schematic diagram to illustrate the situation of possible interference types.

30

For the purpose of describing an embodiment of the invention, Fig. 1 shows the components of a transponder in a communication satellite as an example for a communication channel which was already explained above.

35

Since the filters provided in the input demultiplexer (IMUX) 3 and the output multiplexer (OMUX) 7 have a strong influence on the performance of the transponder, the method according to the invention will be explained in following with respect to measuring two specific characteristics, namely amplitude response and group delay, of these components of the transponder communication channels, the method of the invention being especially suitable for this application.

However, the same or other characteristics of other components of the communication channel can be determined by means of the method and the apparatus according to the invention.

5

According to the invention, in a ground station as shown in Fig. 2, a pseudo noise signal $PN(t)$ is generated by means of a pseudo noise signal generator 9, for example, a feed back shift register or a memory device in which a sequence of values of a pseudo noise signal is stored. The pseudo noise signal $PN(t)$ has a very sharp autocorrelation function at zero delay. This allows to determine the time delay between the locally generated pseudo noise signal $PN(t)$ and a received signal which is delayed due to the propagation time. A clean carrier signal $f(t)$ having a variable frequency, which is varied as explained further below, is modulated with said pseudo noise signal $PN(t)$ by means of a first multiplier 10 to form a spreaded clean carrier signal $s(t) = PN(t) \times f(t)$. The chiprate of the pseudo noise signal $PN(t)$, which determines the bandwidth of this signal, is chosen such the bandwidth of the spreaded clean carrier signal $s(t)$ is narrow in comparison with the expected peaks in group delay of the communication channel. Typically, the chiprate of the pseudo noise signal may be chosen less than 5 Mchip/s.

25

The spreaded clean carrier signal $s(t)$ is fed to an upconverter 11 and via a high power amplifier 12 to an antenna 13 which transmits the spreaded clean carrier signal $s(t)$ to the transponder of the communication satellite under test. However, from the viewpoint of a user transmitting a payload signal to the satellite, the transponder remains usable during the test and can be continuously supplied with a payload signal.

35 According to the invention, the level of the transmitted spreaded clean carrier signal $s(t)$ is sufficiently below the level of the payload signal, for example about 15 to 25 dB or more, such that the payload signal is not notably

deteriorated. For this reason, the spreaded clean carrier signal $s(t)$ can be transmitted while the communication channel is in use, i.e. simultaneously with a payload signal being transmitted to the transponder of the satellite from the same or from another ground station.

The frequency of the clean carrier signal $f(t)$ is changed such that it sweeps from the lowest to the highest frequency of the pass band of the filters in the satellite transponder, or any other component of a general communication channel under test. The spreaded clean carrier signal $s(t)$ has a narrow bandwidth due to the pseudo noise signal $PN(t)$ such that amplitude response and group delay of the communication channel can be determined at selected discrete frequencies, as will be described in the following.

In the embodiment, antenna 13 is also used to receive the signal re-transmitted by the transponder of the satellite, in other words the signal which has traveled through the communication channel. The output signal of antenna 13 is passed through a downconverter 14 to obtain a receive signal $s'(t)$ which is fed to a second multiplier 15 receiving also the same but delayed pseudo noise signal $PN(t)$. The delay is generated by delaying means 16 which are set such that the output of the second multiplier 15 becomes maximum. Thereby, the receive signal $s'(t)$ is multiplied, in other words correlated with the very same pseudo noise signal $PN(t)$ which has been used for generating the spreaded clean carrier signal $s(t)$ and a despreaded carrier signal $f'(t)$ is obtained which is only delayed and attenuated in comparison with the clean carrier signal $f(t)$. Thus, the amplitude response, which corresponds to the attenuation of the despreaded carrier signal $f'(t)$, and the group delay, which corresponds to the delay of the despreaded carrier signal $f'(t)$, of the transponder of the satellite, as an example of a general communication channel, can easily be determined. The runtime of a narrowband signal at its center frequency corresponds to the group delay of the filters if the phase can be linearly

approximated in the signal bandwidth. The chiprate of the PN signal is determined accordingly.

As far as communication satellites are concerned, it is
5 sufficient to determine the amplitude response and group delay over the pass band of a transponder only relative to the amplitude response and group delay at the center frequency of the pass band. Therefore, it is sufficient to delay the pseudo noise signal $PN(t)$ such that the amplitude
10 of the despreaded carrier signal $f'(t)$ becomes maximal and to subtract the amplitude and the delay at the center frequency from the amplitude and the delay at any other frequency in the pass band, respectively.

15 Fig. 3a and 3b show typical measurement result for amplitude response (Fig. 3a) and group delay (Fig. 3b) as obtained by the method according to the invention.

In the case of a satellite communication channel, i.e. a
20 transponder, it should be noted that, during measurements, due to the movements of the satellite the distance to the satellite can change. Also, during measurements, due to atmospheric effects the attenuation of the path loss between the ground station and the satellite can change.
25 Since in the above embodiment the amplitude response and the group delay is determined by subtracting the amplitude response and the group delay at the center frequency from the respective values at other discrete frequencies, an error might occur due to the before mentioned satellite movements
30 and atmospheric effects or other influences.

As shown in Fig. 4, a reference signal $s_R(t)$ can be used to compensate the before mentioned measurement error. In Fig. 4 the same reference signs are used for those parts already
35 described above and reference is made to the above description of these parts. The reference signal $s_R(t)$ is generated by means of a third multiplier 18 which receives a second pseudo noise signal $PN_R(t)$, which is not correlated

with the first pseudo noise signal $PN(t)$ and which is generated by a second pseudo noise generator 17, and a reference carrier signal $f_R(t)$ which may be located at a fixed frequency somewhere within the pass band of the same transponder or in the pass band of another transponder on the same satellite having a different center frequency. Like in the above embodiment, a spreaded reference carrier signal $s_R(t)$ is transmitted to the satellite and the reference receive signal $s_R'(t)$ is multiplied with the second pseudo noise signal $PN_R(t)$ to obtain the despreaded reference signal $f_R'(t)$. While the measurement signal is swept in frequency over the transponder pass band, the frequency of the reference carrier signal $f_R(t)$ remains at a fixed frequency. Therefore, a corrected amplitude response and group delay of the communications channel can be obtained by subtracting the values of the reference signal from the values of the measurement signals at the respective time.

A variation of the described measuring the group delay consists of measuring the phase of the reconstructed carrier of the spreaded signal at a specified frequency very close to the first frequency, it is possible to approximate the group delay at the frequency located in the middle of both measurement frequencies by calculating the phase difference and dividing by the frequency difference.

Only pseudo noise signals have been discussed above because these signals can be generated comparatively easily. However, true noise signals can be used in the method and the apparatus according to the invention. Properties of true and pseudo noise signals are well known to those skilled in the art and are described, for example in Bernard Sklar, "Digital Communications - Fundamentals and Applications", Prentice Hall, 1988.

Fig. 5 shows a schematic diagram to illustrate the situation of possible interference types. Fig. 5 assumes the situation

when a satellite 31 was just launched and is now subject of various types of tests in its beginning of life phase. The responsible station for carrying out these tests is the ground station 30. While carrying out these tests it has to
5 be ensured that the communication channels of adjacent satellites are not affected. Thus, satellite 32 represents possible adjacent satellites which could be affected by the measurements carried out for satellite 31. Signals sent out by satellite 32 are received by a plurality of enduser
10 terminals which are represented by the enduser terminal 33.

Basically, two types of interference from the measurement signals on satellite 31 to satellite 32 and the corresponding enduser terminals 33 may happen: Either the users of
15 satellite 32 receive through their (small) dish the measurement signal directly via satellite 31, i.e. in addition to the payload signal of satellite 32, or the station 30 transmits also a small portion of its signal to the adjacent satellite 32. The first type of interference is
20 more likely to happen, as professional stations normally have a much higher discrimination than enduser antennas just because of the different size of the aperture. In this respect, the driving factor for dimensioning the measurement signal uplink power depends upon the spatial separation of
25 both satellites and the related antenna discrimination, as well as on the level difference between payload signal B and the measurement signal A.

It has to be noted, that the invention also allows to carry
30 out the necessary measurements with an antenna having a smaller aperture than a conventional antenna of the own earth station 30. Due to the decreased spatial separation of a smaller type of antenna the interference type 2 might occur. However, this is not critical as long as the spread clean
35 carrier signal $s(t)$ is received by an end user terminal 33 of a communication channel of satellite 32 with a level which is under the level of a received payload signal of said communication channel by a predetermined threshold.

CLAIMS

1. Method for determining characteristics of components of
5 a communication channel, comprising:
- modulating a clean carrier signal $f(t)$ by spread
spectrum modulation to generate a spreaded clean carrier
signal $s(t)$;
10
 - transmitting said spreaded clean carrier signal $s(t)$
through said communication channel at a first
predetermined level;
 - 15 - receiving a receive signal $s'(t)$ corresponding to said
spreaded clean carrier signal $s(t)$ after having traveled
through said communication channel;
 - demodulating said receive signal $s'(t)$ by spread
20 spectrum demodulation to generate a despreaded carrier
signal $f'(t)$;
 - determining characteristics of components of the
communication channel on the basis of a comparison of
25 said clean carrier signal $f(t)$ and said despreaded
carrier signal $f'(t)$.
2. Method according to claim 1, wherein the spread spectrum
30 modulation comprises the steps of
- generating a first pseudo noise signal $PN(t)$;
 - modulating said clean carrier signal $f(t)$ with said
first pseudo noise signal $PN(t)$ to generate said
35 spreaded clean carrier signal $s(t)$;
- and wherein the spread spectrum demodulation comprises
the steps of

- correlating said receive signal $s'(t)$ with said first pseudo noise signal $PN(t)$ to generate said despreaded carrier signal $f'(t)$.

- 5 3. Method according to claim 1 or 2, wherein the communication channel is a satellite communication channel set up by a transponder of a satellite.
- 10 4. Method according to claim 3, wherein said first predetermined level is adjusted by a predetermined threshold below the level of a transmitted payload signal of an adjacent satellite communication channel.
- 15 5. Method according to one of the claims 1 to 3, wherein said first predetermined level of said spreaded clean carrier signal $s(t)$ is adjusted by the following steps:
- 20 a) setting a preliminary level which corresponds to a lower limit in the communication channel;
- 25 b) processing said despreaded carrier signal $f'(t)$ in order to determine actual characteristics of said despreaded carrier signal $f'(t)$;
- 30 c) determining the deviation between the actual characteristics and predetermined desired characteristics of said despreaded carrier signal $f'(t)$;
- 35 d.1) if the deviation is above a predetermined deviation: increasing the preliminary level by an incrementation parameter and repeating steps b) to d.1);
- d.2) otherwise allocate the actual preliminary level to said first predetermined level.
6. Apparatus for determining characteristics of components of a communication channel, comprising:

- first modulating means (10) for modulating a clean carrier signal $f(t)$ by spread spectrum modulation to generate a spreaded clean carrier signal $s(t)$;
 - 5 - transmitting means (11, 12, 13) for transmitting said spreaded clean carrier signal $s(t)$ through said communication channel at a first predetermined level;
 - 10 - receiving means (13, 14) for receiving a receive signal $s'(t)$ corresponding to said spreaded clean carrier signal $s(t)$ after having traveled through said communication channel;
 - 15 - demodulating means for demodulating said receive signal $s'(t)$ by spread spectrum demodulation to generate a despreaded carrier signal $f'(t)$; and
 - 20 - determining means for determining characteristics of components of the communication channel on the basis of a comparison of said clean carrier signal $f(t)$ and said despreaded carrier signal $f'(t)$.
7. Apparatus according to claim 6, wherein the first modulation means (10) comprises
- 25 - first pseudo noise signal generating means (9) for generating a pseudo noise signal $PN(t)$, said clean carrier signal $f(t)$ is modulated with said first pseudo noise signal $PN(t)$ to generate said spreaded clean carrier signal $s(t)$;
- 30 and wherein the demodulation means comprises
- 35 - first correlating means (14) for correlating said receive signal $s'(t)$ with said pseudo noise signal $PN(t)$ to generate said despreaded carrier signal $f'(t)$.

8. Apparatus according to claim 5 or 6, wherein the communication channel is a satellite communication channel set up by a transponder of a satellite.
- 5 9. Apparatus according to claim 8, wherein said first predetermined level is adjusted by a predetermined threshold below the level of a transmitted payload signal of an adjacent satellite communication channel.
- 10 10. Apparatus according to one of the claims 5 to 8, further comprising for adjusting said first predetermined level of said spreaded clean carrier signal:
- 15 - setting means for setting a preliminary level which corresponds to a lower limit in the communication channel;
- 20 - processing means for processing said despreaded carrier signal $f'(t)$ in order to determine actual characteristics of said despreaded carrier signal $f'(t)$ and for determining the deviation between the actual characteristics and predetermined desired characteristics of said despreaded carrier signal $f'(t)$;
- 25 - increasing means for increasing the preliminary level by an incrementation parameter if the deviation is above a predetermined deviation;
- 30 - allocation means for allocating the actual preliminary level to said first predetermined level if the deviation is below or equal a predetermined deviation.

AMENDED CLAIMS

[received by the International Bureau on 31 August 2000 (31.08.00);
original claims 1 - 10 replaced by new claims 1 - 8 (5 pages)]

5

NEW CLAIMS

1. Method for determining characteristics of components of a transponder of a communication satellite, comprising:
 - 10 - modulating a clean carrier signal $f(t)$ by spread spectrum modulation to generate a spreaded clean carrier signal $s(t)$;
 - transmitting said spreaded clean carrier signal
15 $s(t)$ through said transponder at a first predetermined level when the satellite is in its beginning of life phase;
 - receiving a receive signal $s'(t)$ corresponding to
20 said spreaded clean carrier signal $s(t)$ after having traveled through said transponder;
 - demodulating said receive signal $s'(t)$ by spread
spectrum demodulation to generate a despreaded
25 carrier signal $f'(t)$;
 - determining characteristics of components of the transponder on the basis of a comparison of said clean carrier signal $f(t)$ and said despreaded
30 carrier signal $f'(t)$.
2. Method according to claim 1, wherein the spread spectrum modulation comprises the steps of
 - 35 - generating a first pseudo noise signal $PN(t)$;

- modulating said clean carrier signal $f(t)$ with said first pseudo noise signal $PN(t)$ to generate said spreaded clean carrier signal $s(t)$;

5

and wherein the spread spectrum demodulation comprises the steps of

- correlating said receive signal $s'(t)$ with said first pseudo noise signal $PN(t)$ to generate said despreaded carrier signal $f'(t)$.

10

3. Method according to claim 1 or 2, wherein said first predetermined level is adjusted by a predetermined threshold below the level of a transmitted payload signal of an adjacent satellite communication channel.

15

4. Method according to one of the claims 1 to 3, wherein said first predetermined level of said spreaded clean carrier signal $s(t)$ is adjusted by the following steps:

20

- a) setting a preliminary level which corresponds to a lower limit in the communication channel;

25

- b) processing said despreaded carrier signal $f'(t)$ in order to determine actual characteristics of said despreaded carrier signal $f'(t)$;

30

- c) determining the deviation between the actual characteristics and predetermined desired characteristics of said despreaded carrier signal $f'(t)$;

d.1) if the deviation is above a predetermined deviation: increasing the preliminary level by an incrementation parameter and repeating steps b) to d.1);

5

d.2) otherwise allocate the actual preliminary level to said first predetermined level.

5. Apparatus for determining characteristics of components of a transponder of a communication satellite, comprising:

10

- first modulating means (10) for modulating a clean carrier signal $f(t)$ by spread spectrum modulation to generate a spreaded clean carrier signal $s(t)$;

15

- transmitting means (11, 12, 13) for transmitting said spreaded clean carrier signal $s(t)$ through said transponder at a first predetermined level when the satellite is in its beginning of life phase;

20

- receiving means (13, 14) for receiving a receive signal $s'(t)$ corresponding to said spreaded clean carrier signal $s(t)$ after having traveled through said transponder;

25

- demodulating means for demodulating said receive signal $s'(t)$ by spread spectrum demodulation to generate a despreaded carrier signal $f'(t)$; and

30

- determining means for determining characteristics of components of the transponder on the basis of a

comparison of said clean carrier signal $f(t)$ and said despreaded carrier signal $f'(t)$.

6. Apparatus according to claim 5, wherein the first modulation means (10) comprises

- first pseudo noise signal generating means (9) for generating a pseudo noise signal $PN(t)$, said clean carrier signal $f(t)$ is modulated with said first pseudo noise signal $PN(t)$ to generate said spreaded clean carrier signal $s(t)$;

and wherein the demodulation means comprises

- first correlating means (14) for correlating said receive signal $s'(t)$ with said pseudo noise signal $PN(t)$ to generate said despreaded carrier signal $f'(t)$.

7. Apparatus according to claim 5 or 6, wherein said first predetermined level is adjusted by a predetermined threshold below the level of a transmitted payload signal of an adjacent satellite communication channel.

8. Apparatus according to one of the claims 5 to 7, further comprising for adjusting said first predetermined level of said spreaded clean carrier signal:

- setting means for setting a preliminary level which corresponds to a lower limit in the communication channel;

- processing means for processing said despreaded carrier signal $f'(t)$ in order to determine actual

characteristics of said despreaded carrier signal $f'(t)$ and for determining the deviation between the actual characteristics and predetermined desired characteristics of said despreaded carrier signal $f'(t)$;

5

- increasing means for increasing the preliminary level by an incrementation parameter if the deviation is above a predetermined deviation;

10

- allocation means for allocating the actual preliminary level to said first predetermined level if the deviation is below or equal a predetermined deviation.

STATEMENT UNDER ARTICLE 19

1. The new independent claims 1 and 5 refer now to a method and an apparatus
for determining characteristics of components of a transponder of a
communication satellite.

This restriction is disclosed by the former subclaims 3 and 8. Furthermore, the
transmitting feature was restricted by the feature that transmitting takes place

when the satellite is in its beginning of life phase.

This feature is disclosed on page 3, 1. and 2. paragraph as well as page 28, 1.
paragraph of the description.

In view of the deleted subclaims 3 and 8, the remaining subclaims were
renumbered accordingly.

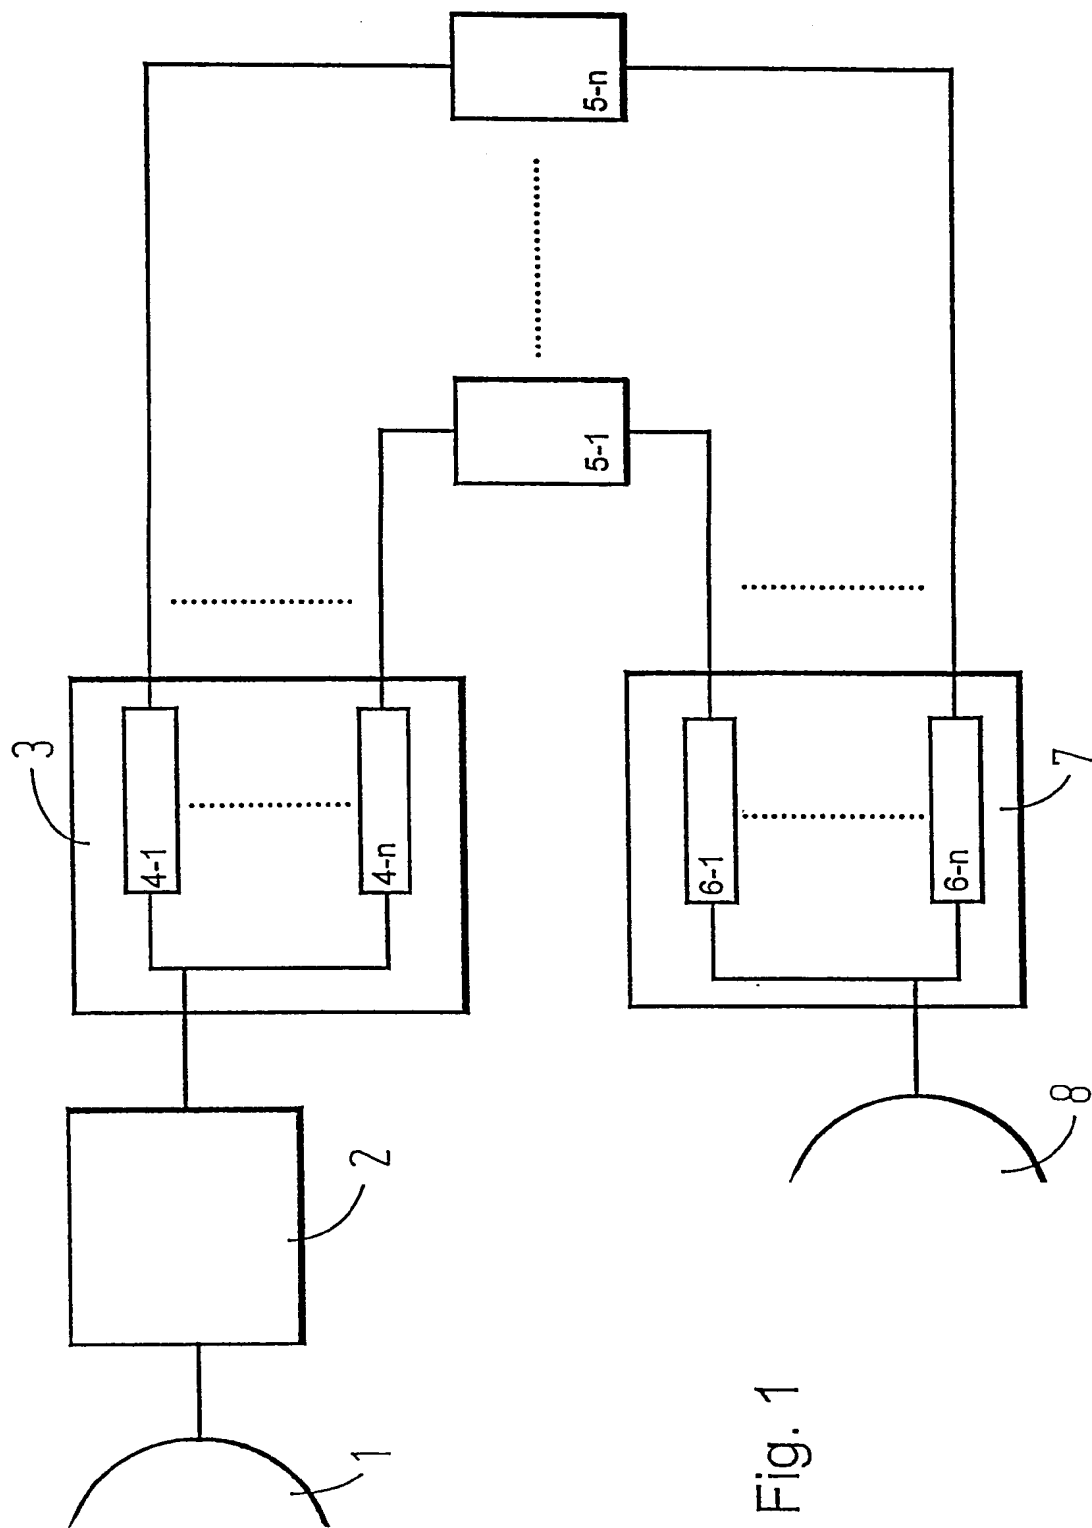
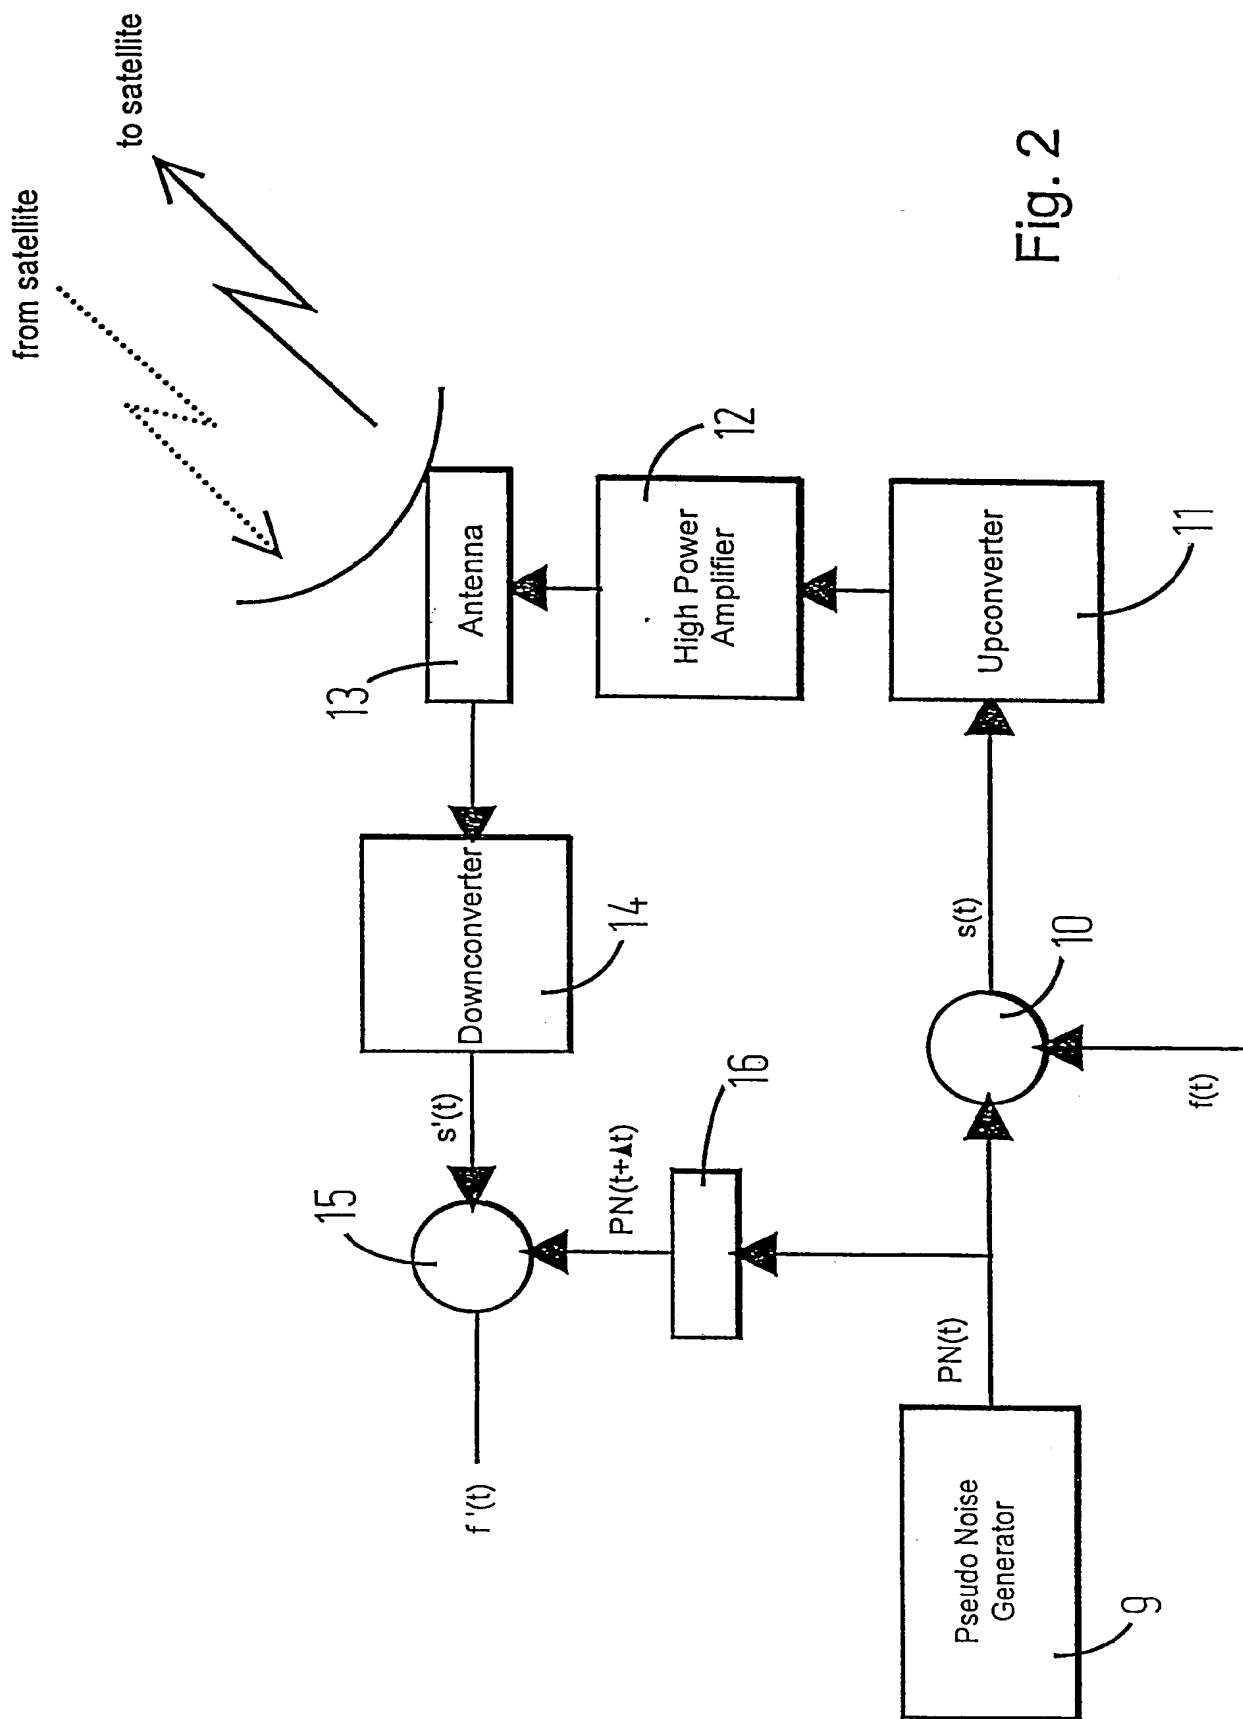


Fig. 1



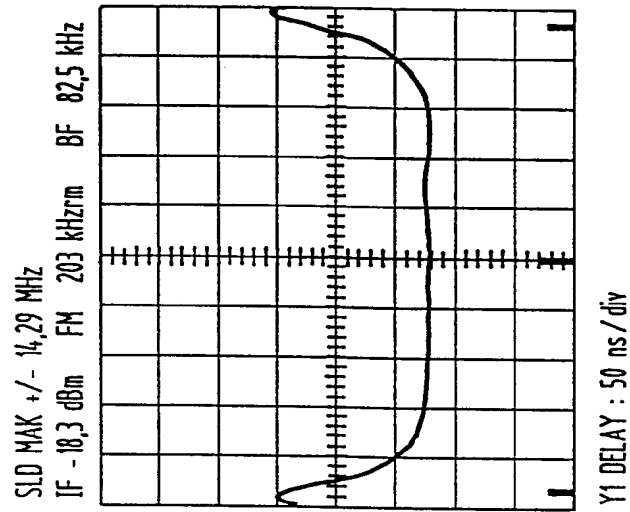


Fig. 3b

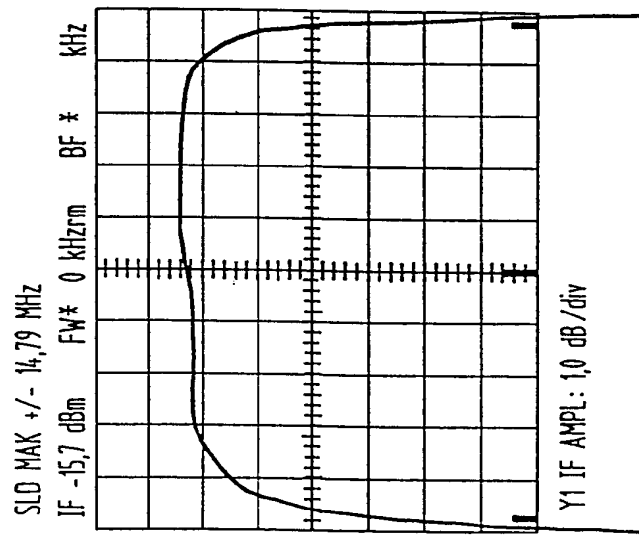


Fig. 3a

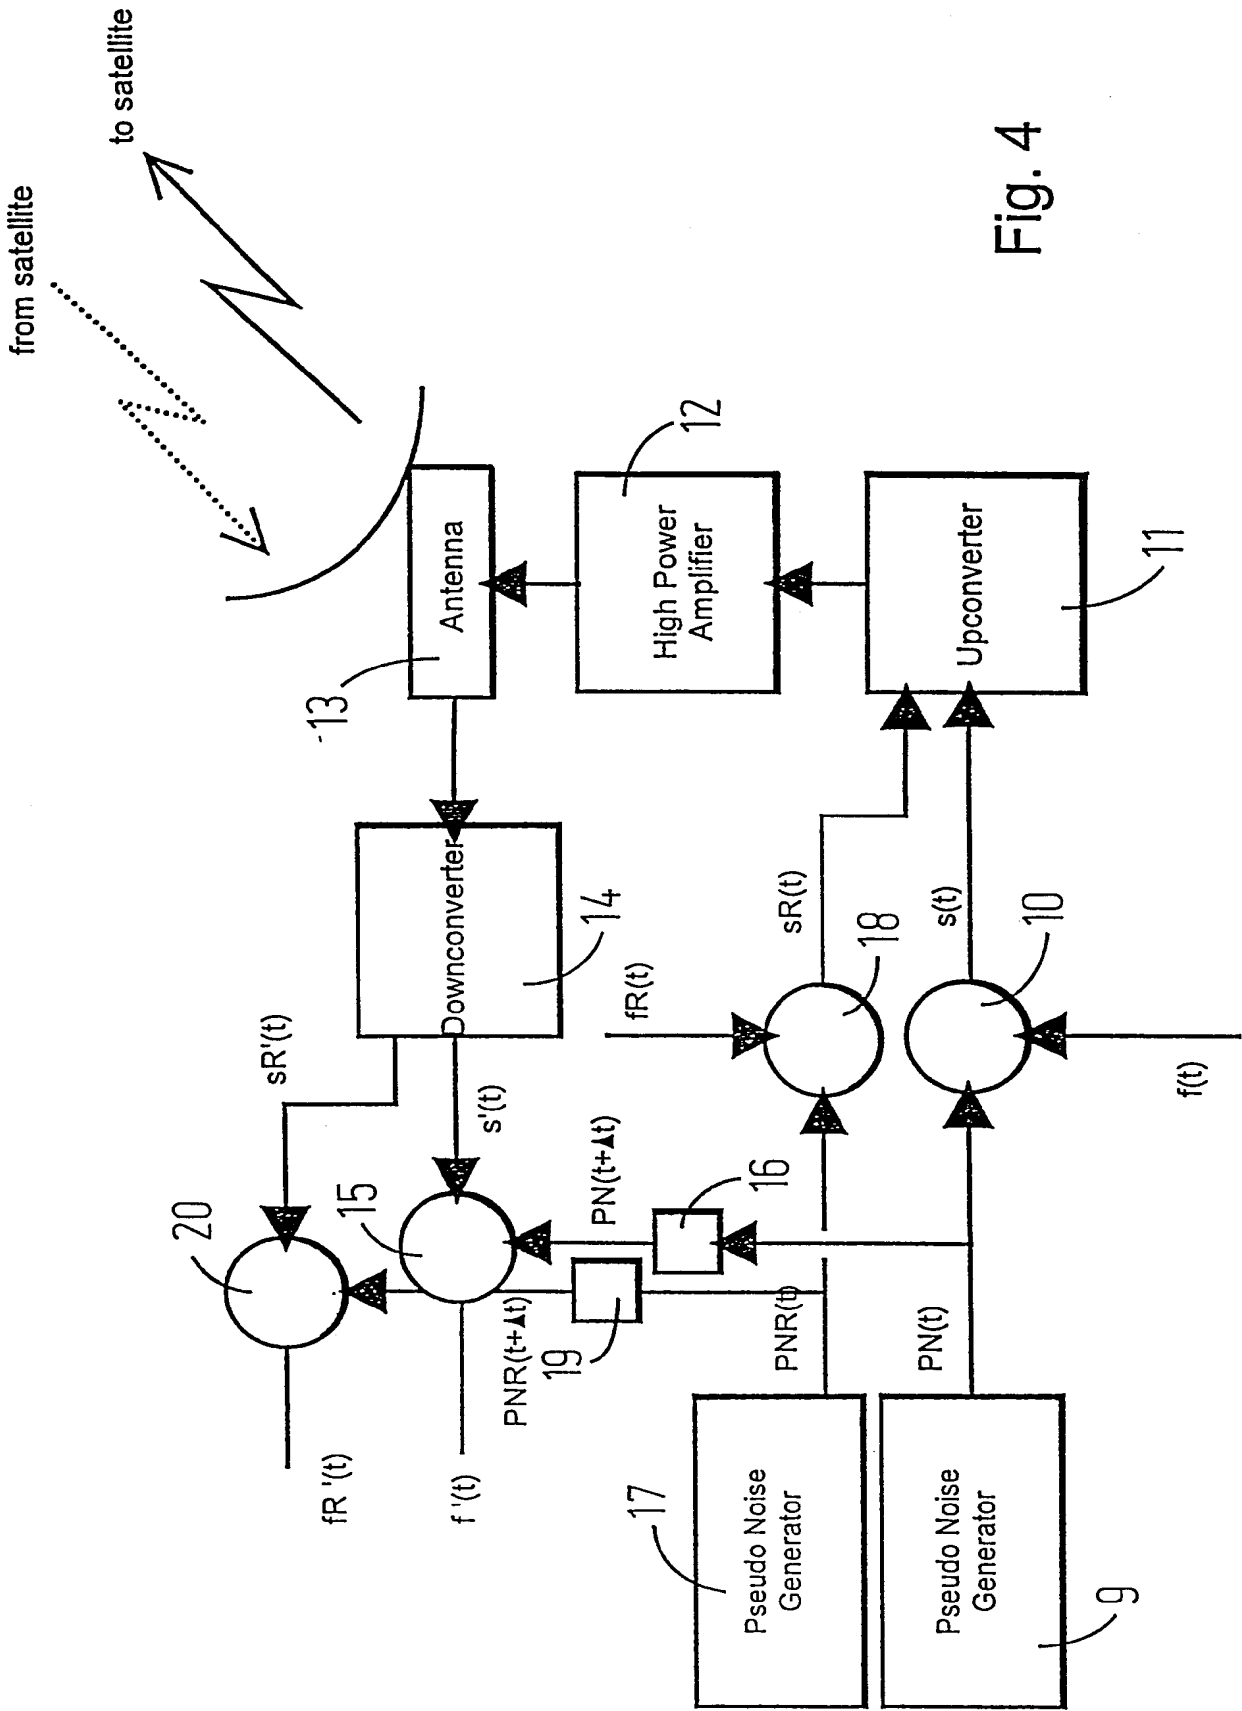


Fig. 4

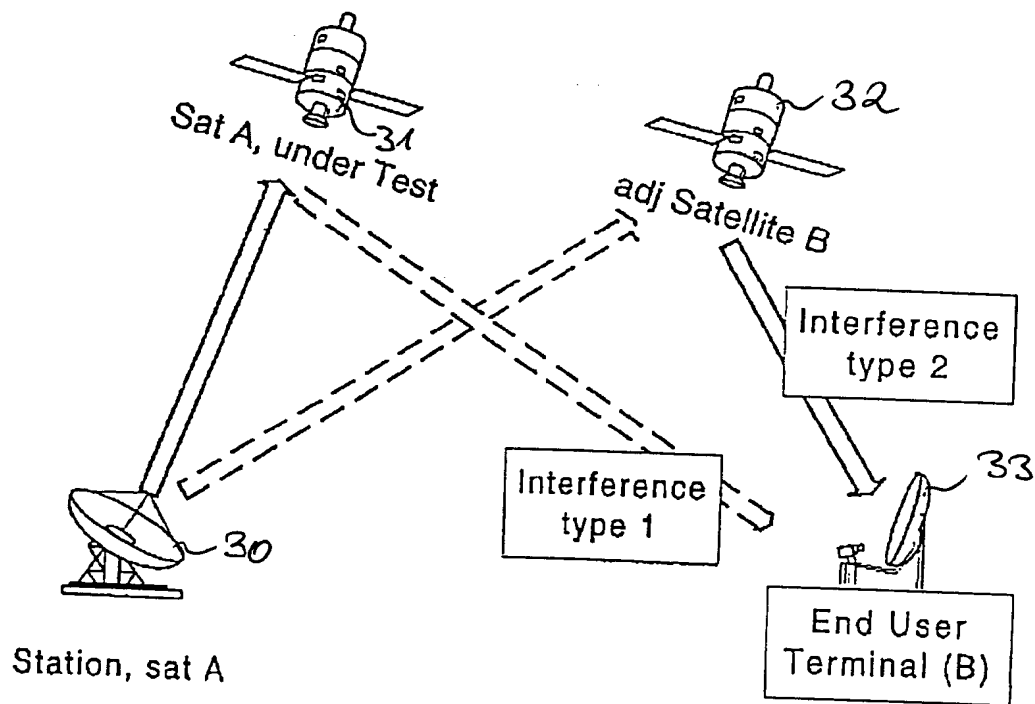


Fig. 5

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 99/04241

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04B17/00 H04B7/185

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 546 421 A (BASILE PHILIP C ET AL) 13 August 1996 (1996-08-13)	1,2,6,7
Y	abstract; figure 1 column 1, line 64 - column 2, line 36 column 3, line 39 - column 4, line 17	3,4,8,9
Y	US 4 637 017 A (BERMAN ARNOLD L ET AL) 13 January 1987 (1987-01-13)	3,4,8,9
A	abstract; figures 1,2,4 column 3, line 21 - line 53 column 4, line 29 - line 59	1,6
	-/-	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"Z" document member of the same patent family

Date of the actual completion of the international search

17 February 2000

Date of mailing of the international search report

28/02/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3018

Authorized officer

Sieben, S

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 99/04241

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 799 005 A (SOLIMAN SAMIR S) 25 August 1998 (1998-08-25) abstract; figures 2,4-6 column 3, line 15 - line 57 column 5, line 24 -column 6, line 54 column 7, line 44 -column 8, line 57	1,2,6,7
E	WO 99 33204 A (EUROP DES SATELLITES S A SOC) 1 July 1999 (1999-07-01) the whole document	1-4,6-9
E	WO 99 33203 A (EUROP DES SATELLITES S A SOC) 1 July 1999 (1999-07-01) abstract; claims 1-3,7,9-12,14,15,18-21,23,24; figures 4,5	1-4,6-9
A	BETHSCHEIDER G ET AL: "Frequency and time dissemination using spread-spectrum coded signals transmitted via direct-TV broadcasting satellites" 10TH EUROPEAN FREQUENCY AND TIME FORUM (CONF. PUBL. NO418), PROCEEDINGS OF 10TH INTERNATIONAL CONFERENCE ON EUROPEAN FREQUENCY AND TIME, BRIGHTON, UK, 5-7 MARCH 1996, page 421 XP002130493 1996, London, UK, IEE, UK ISBN: 0-85296-661-X the whole document	1-4,6-9
A	DE 36 44 175 A (MESSERSCHMITT BOELKOW BLOHM) 14 July 1988 (1988-07-14) abstract; claims 1,2; figures 4-7 column 1, line 29 - line 52 column 2, line 16 - line 23 column 3, line 15 - line 63	1-4,6-9

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/EP 99/04241

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 5546421	A	13-08-1996	NONE		
US 4637017	A	13-01-1987	NONE		
US 5799005	A	25-08-1998	NONE		
WO 9933204	A	01-07-1999	EP	0930734 A	21-07-1999
			AU	2414999 A	12-07-1999
			EP	0967744 A	29-12-1999
WO 9933203	A	01-07-1999	EP	0929164 A	14-07-1999
			AU	2513499 A	12-07-1999
DE 3644175	A	14-07-1988	NONE		